

PosiPen



Measures non-magnetic coatings such as paint, enamel, plating, hot-dip galvanizing on steel.

Ideal for measuring on small, hot or hard-to-reach surfaces.





PosiPen

PosiPen has a very small, unique magnet which can be placed with pin-point accuracy on extremely small parts, and on peaks and valleys.

Used for:

- Small, hot or hard-to-reach surfaces
- Spot Checks conveniently fits in a shirt pocket
- Hot Sprayed Coatings

Ideal for:

- Refineries, petrochemical plants
- Platers electroplating, chrome, zinc, galvanizing
- Powder coaters

Simple

- Easy-to-Use
- Lightweight easy to carry, just like a ball point pen

Durable

- No batteries/Electronics
- Rugged not affected by mechanical shock, acid, oil, water and dust

Accurate


- No user adjustment required
- Long Form Certificate of Calibration traceable to PTB included
- Highly wear resistant probe tip for long life and continuous accuracy



		English	Metric
	Range	0.25 to 20 mils	5 to 500 microns
	Tolerance	+/-10% and 0.1 mil	+/-10% and 2.5 microns
	Temperature	-150° F to + 450° F	-100° C to + 230° C

Conforms to National and International Standards including ASTM D7091/B499, ISO 2808 and others

Gage comes complete with leather pouch, instructions, Long Form Certificate of Calibration traceable to PTB, two (2) year warranty.

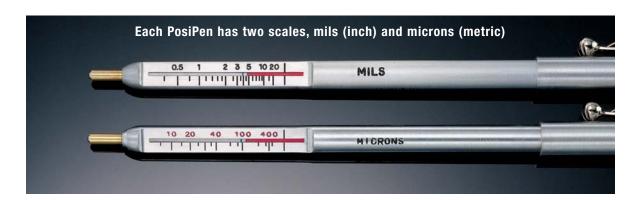

Office: Jl. Radin Inten II No. 62 Duren Sawit, Jakarta 13440 - Indonesia Workshop: Jl. Pahlawan Revolusi No. 22B, Jakarta 13430 - Indonesia

Phone: 021-8690 6777 (Hunting)

Mobile: +62 816 1740 8925

Fax: 021-8690 6771