

Model

TVC-7 VISCOMETER



responding swiftly to your needs


Unrivalled convenience! Easy on-site viscosity measurement.

Operation display

- * Measurement underway
- Measurement stopped

Measurements value

- Top line: viscosity
- Bottom line: %
("OVER" scale indication)

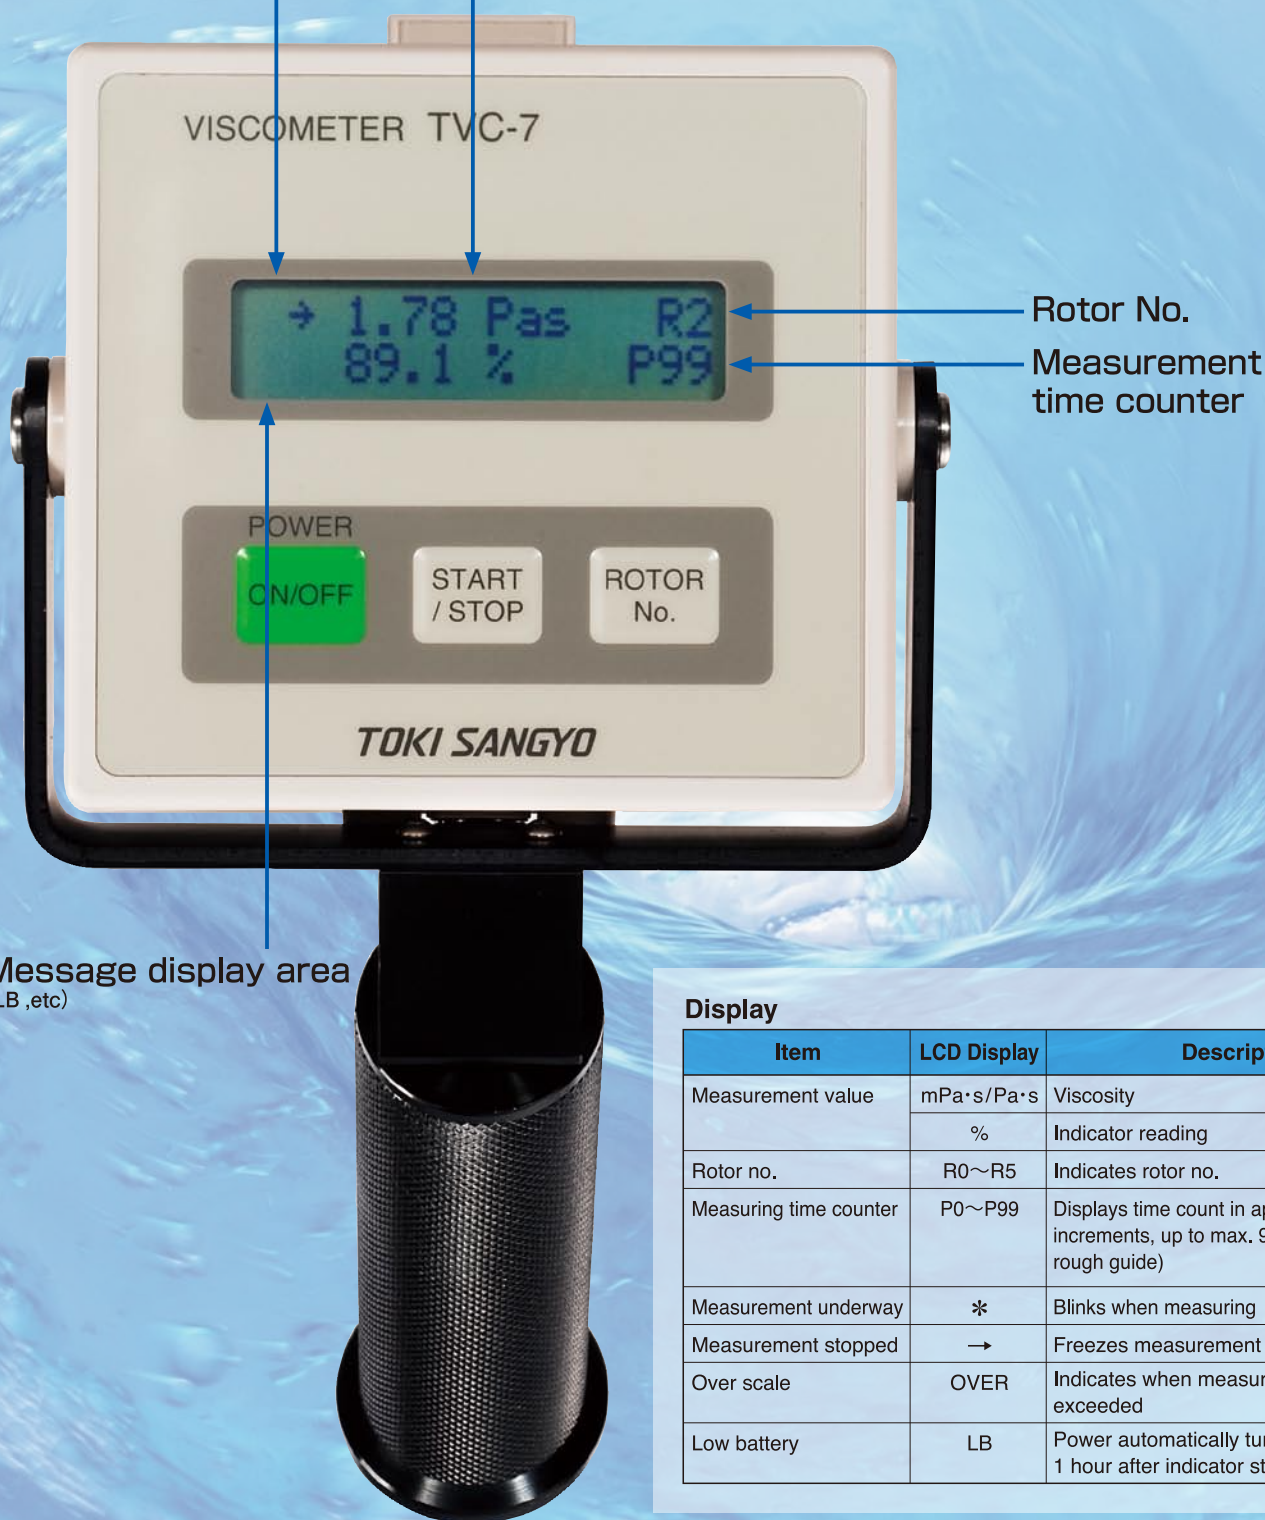

Rotor No.

Measurement time counter

Message display area
(LB, etc)

Display

Item	LCD Display	Description
Measurement value	mPa·s/Pa·s	Viscosity
	%	Indicator reading
Rotor no.	R0~R5	Indicates rotor no.
Measuring time counter	P0~P99	Displays time count in approx. 1 sec. increments, up to max. 99 (used as a rough guide)
Measurement underway	*	Blinks when measuring
Measurement stopped	→	Freezes measurement value
Over scale	OVER	Indicates when measurement range is exceeded
Low battery	LB	Power automatically turned OFF approx. 1 hour after indicator starts blinking

The new handy type Model TVC-7 rotary viscometer provides worry-free viscosity measurement and unmatched convenience. Designed for enhanced ease of use and low power consumption, this advanced viscometer can be used for long hours without worrying about loss of battery power making it an invaluable partner in production on-site quality control applications.

Handy type design

Measure viscosity anywhere

Digital display

Reliable readouts of measured values

Easy to see display

Two-line LCD displays all data

Elapsed time display

Elapsed measurement time display

Independent control keys

Only 3 control keys for easy measurement

Cordless design

Smartly designed unit houses batteries

Drop protection

Slip-resistant grip and wrist strap prevents accidental dropping

Power saving design

Number of batteries reduced from 4 to 3 with approx, fourfold increase in continuous operation time. (Compared to Model TVC-5) Auto Power-Off function extends battery life.



